



FULL INSTRUCTIONS

COMBICHILLA 18L

THE ULTIMATE BANKSIDE CHILLA

PACKAGE

CONTENTS


- CombiChilla 18 Litre
- Removable shelf
- 12V DC cable

NB: due to constant development, enclosed accessories may differ

IDENTIFICATION OF


PARTS

- 1** 12V DC input
- 2** Control panel
- 3** Door
- 4** Carry handle

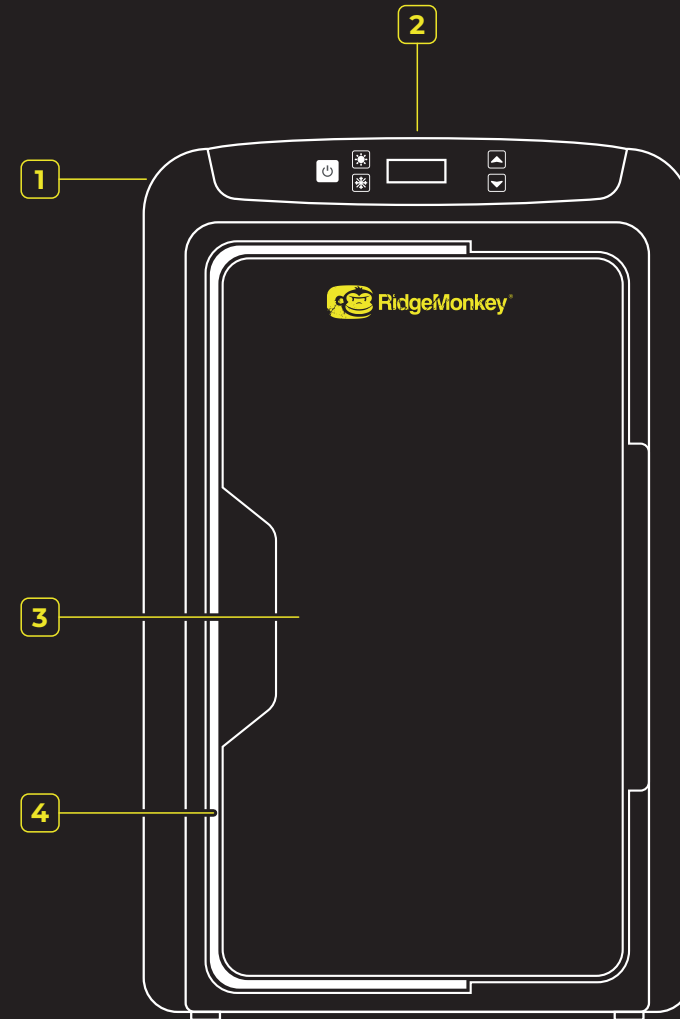

CONTROL

PANEL

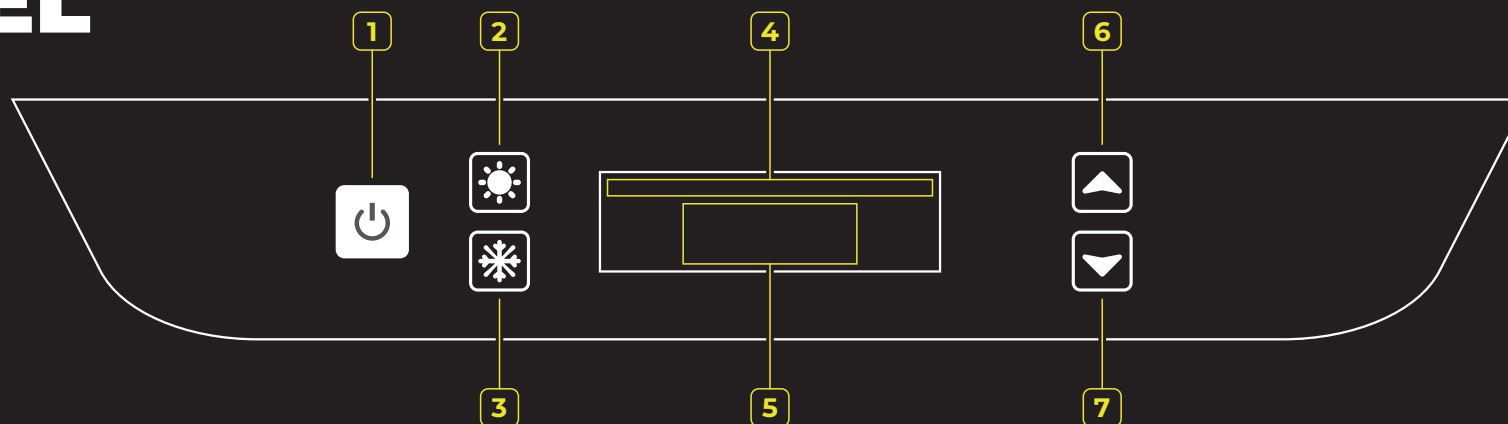

1 Power button

2 Heat mode button

3 Chill mode button

4 Current mode display

5 Temperature display

6 Target temperature increase button

7 Target temperature decrease button

TECHNICAL

SPECIFICATIONS

Input: 12V DC

Refrigeration rated power: 46W

Heating rated power: 38W

Minimum cooling temperature: 5°C

Maximum heating temperature: 60°C

Cooling performance: max 18°C below ambient

Heating performance: max 50°C above ambient

Note: Target temperature can be adjusted to the lowest available setting to maximise cooling power. The CombiChilla can cool down to 5°C, though actual performance will depend on ambient temperature and the contents of the box.



ORIENTATION

The CombiChilla can be used both horizontally or vertically

COMBICHILLA

POWER AND SETUP

01

CONNECT THE 12V DC CABLE TO A 60W OR GREATER 12V DC POWER SUPPLY



02

THE COMBICHILLA WILL AUTOMATICALLY ACTIVATE IN STANDBY MODE WITH THE CURRENT INTERNAL TEMPERATURE DISPLAYED



03

PRESS THE POWER BUTTON TO FULLY ACTIVATE THE COMBICHILLA CONTROL PANEL



04

PRESS THE APPROPRIATE MODE BUTTON TO CHOOSE BETWEEN HEAT OR CHILL MODE



05

PRESS THE APPROPRIATE TEMPERATURE BUTTON TO INCREASE OR DECREASE THE TARGET TEMPERATURE



06

THE COMBICHILLA DISPLAY WILL REVERT TO THE CURRENT INTERNAL TEMPERATURE AFTER A FEW SECONDS



ADJUSTING

MODE OR TEMPERATURE



The CombiChilla mode and target temperature can be adjusted at any point by pressing the appropriate buttons. Press the power button to alternate between fully active and standby



Both the cooling and warming performance will be influenced by the temperature of the surrounding (ambient) air, the contents, and the frequency with which the lid is opened



For optimum performance it is recommended to pre-heat or pre-chill the CombiChilla and it's intended contents

USAGE NOTES

Only use the CombiChilla with the provided power cable. If your cable becomes lost or damaged, please contact RidgeMonkey Customer Services to arrange a replacement

Only use a 12V DC electric supply. Do not use the CombiChilla with 24V DC or any other voltage. Doing so will damage the CombiChilla and void your guarantee

The 12V DC plug will become warm during use. Take care when removing the plug from the 12V DC socket and **DO NOT** touch the metal contacts which may be hot

During use, allow at least 150mm of space in each available direction around the CombiChilla

NEVER block the ventilation fan or any of the vents

Do not use the CombiChilla in direct sunlight

Do not expose the CombiChilla to rain or damp conditions

Never fill the CombiChilla with water or ice

Condensation may form inside the CombiChilla during use. This is normal and not a cause for concern. Any condensation should be wiped away at the earliest opportunity

For optimum efficiency, the CombiChilla should be pre-chilled or pre-heated before loading

The CombiChilla is not intended for long-term storage of perishable items

The CombiChilla is intended for temporary in-vehicle, camping, caravanning and leisure use. It is not a fridge or cooker designed for permanent installation and should not be used as such

CLEANING, MAINTENANCE & STORAGE

Wipe with a soft, damp cloth and ensure the product is fully dry before storage.

CAUTION

12V DC input. Do not short circuit or reverse polarity

Surfaces may become frozen

Surfaces may become hot

IMPORTANT NOTICE

Read and understand this manual and its instructions before using this product. Failure to do so may result in serious injury.

Keep all product information and instructions for future reference and pass them onto subsequent users of the product. The manufacturer is not liable for cases of material damage or personal injury caused by incorrect handling or non-compliance with the supplied instructions. In such cases, any guarantee or warranty shall be voided.

Where applicable, this product and any included accessories are in conformity with the relevant UK & EU harmonisation legislation. Please visit ridgemonkey.co.uk/declaration-of-conformity to view the most recent Declaration of Conformity file(s) for this product.

GUARANTEE

This product is covered by a 24-month guarantee.

For information regarding our guarantee, please visit: ridgemonkey.co.uk/general/guarantee

CONTACT US

For any enquiries or comments concerning our products, please use the contact form on ridgemonkey.co.uk or email info@ridgemonkey.co.uk or nl@ridgemonkey.co.uk and one of our experienced team will respond as soon as possible.

Alternatively, you can write to us at:

RidgeMonkey Group Ltd, PO Box 289, Widnes, WA8 2FP, England.

or

S&G Trading NW Ltd Netherlands Branch, Postbus 60100, 1320 AC Almere, Holland.